

Vented Light Traction

Technical data sheet

FF types

Technical features:

- Vented batteries with positive flat (grid) plates
- Good high-rate discharge capability
- Optimized chargers are available for all blocks

Standards & certifications:

- 300 cycles according to IEC 60254-1



Nominal capacity
40.0-297 Ah C₅
50.0-385 Ah C₂₀



Block battery



Grid plate



300 cycles in
accordance with
IEC 60254-1



Recyclable



Special high
current
performance

Technical characteristics and data

Type	Nominal voltage	Nominal capacity		Length	Width	Height	Weight*	Terminal	Terminal position	Group size BCI
		C ₅ (86°F) C ₅ (30°C)	C ₂₀ (86°F) C ₂₀ (30°C)							
	V	Ah	Ah	max. in max. mm	max. in max. mm	max. in max. mm	kg			
FF06187L	6	187	232	10.2 260	7.1 181	11.3 286	61.7 28	A- / WNT-Terminal	1	
FF062001C	6	200	235	9.7 246	7.5 190	10.7 272	70.5 32	A-Terminal	1	BCI GC2**
FF062002C	6	200	235	10.4 265	7.2 184	10.6 269	63.9 29	A-Terminal	1	BCI GC2
FF06255C	6	255	285	12.3 313	7.2 184	14.0 355	108 49	A-Terminal	1	BCI 305
FF06297L	6	297	385	11.9 302	7.1 181	16.7 425	110.2 50	A- / WNT-Terminal	1	BCI 903**
FF08147K	8	147	183	10.2 260	7.1 181	11.3 286	67.0 30.4	WNT-Terminal	2	GC8H
FF12085C	12	85.0	110	12.9 328	6.9 174	8.5 216	59.5 27	A-Terminal	2	
FF12158L	12	158	200	15.6 397	7.0 179	14.9 378	108.9 49.4	A- / WNT-Terminal	3	BCI 921

* The weights may exhibit a tolerance of +/-5%

** Overall dimensions of the battery might slightly differ from the BCI standard

Manufacturer: by /**MERICAS**
Exide Technologies SLU • Carretera A-2, km 41,800
19200 Azuqueca de Henares • Guadalajara, Spain

mericas-energy.com




Vented Light Traction


Technical data sheet

FF-types

Drawings, terminal and torque

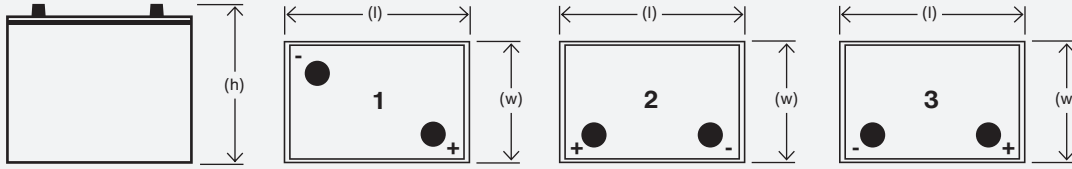

Not to scale!



8 Nm



16 Nm

Manufacturer: by /**MERICAS**
Exide Technologies SLU • Carretera A-2, km 41,800
19200 Azuqueca de Henares • Guadalajara, Spain

mericas-energy.com

 **MERICAS**[®]